

LP GAS HOSE & ASSEMBLIES

LP Gas Hose

Application

Complete range of sizes for all stages of production and delivery of LP gas products. Approved under U.L. Standard 21. 1750 PSI minimum burst. Tube is black NBR; cover is black neoprene with one, two, or three textile braids. Available by the foot or on reels.

Ordering Information

Item Number	I.D.	O.D.	Minimum Bend Radius	Maximum Rec. PSI
7132-.25	1/4	19/32	3"	350
7132-.375	3/8	3/4	4"	350
7132-.50	1/2	15/16	6"	350
7132-.75	3/4	1-1/4	8"	350
7132-1.0	1	1-1/2	10"	350
7232-1.25	1-1/4	1-7/8	12"	350
7232-1.50	1-1/2	2-5/32	14"	350
7232-2.0	2	2-3/4	16"	350



LP Gas Hose

LP Gas Hose with Factory Assembled Ends


Application

LP gas hoses with M. NPT ends factory assembled. For use in temporary installations, transferring gas, filling cylinders and other uses.

Ordering Information

1/4"-2" LP hose with ends. Any length available.

IPS Equipment, Inc. is a Parker LPG Hose Distributor. We can assemble any length hose and ship the same day.

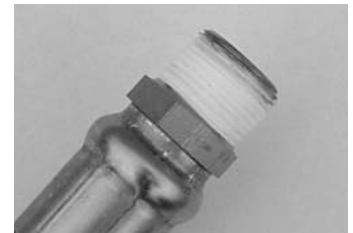

LP Gas Hose Assembly

Bobtail Delivery Hoses

Application

1" LP gas hose with factory assembled 1" M. NPT ends tested & tagged.

Ordering Information

Item Number	Description
D7132-1.0 x 125'	1" x 125' LP Hose with 1" M. NPT Ends
D7132-1.0 x 150'	1" x 150' LP Hose with 1" M. NPT Ends



Delivery Hose

Pig's Tail

Application

Protective hose wrap. Excellent for delivery hoses and hoses at the bulkhead to protect against abrasion and extend the life of hose.

Ordering Information

Item Number	Description
PIG'S TAIL 22	Protective Hose Wrap for 2" LP Hose (22')
PIG'S TAIL 66	Protective Hose Wrap for all 2" LP Hose (66')
PIG'S TAIL 22-1	Protective Hose Wrap for 1" LP Hose (22')
PIG'S TAIL 66-1	Protective Hose Wrap for all 1" LP Hose (66')



Pig's Tail

Carburetion Hose

Application

For carburetor applications and wherever a strong, corrosion resistant LP gas hose is desired. Handles propane, butane, or natural gas in liquid and gas form. U.L. 21 listed; 1750 PSI minimum burst. Tube is black neoprene; cover is rubber with textile braid impregnated and contains one S.S. wire braid for reinforcement.

Ordering Information

Item Number	I.D.	Minimum Bend Radius	Maximum Rec. PSI
7233-311	5/16	4"	350
7243-311	13/32	2"	350



Carburetion Hose